PCT

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : **G01K 15/00**	**A1**	(11) International Publication Number: **WO 97/25603** (43) International Publication Date: 17 July 1997 (17.07.97)

|	
(21) International Application Number: PCT/US96/20557 (22) International Filing Date: 18 December 1996 (18.12.96) (30) Priority Data: 08/582,515 3 January 1996 (03.01.96) US (71) Applicant: ROSEMOUNT INC. [US/US]; 12001 Technology Drive, Eden Prairie, MN 55344 (US). (72) Inventor: ERYUREK, Evren; 4952 York Avenue South, Minneapolis, MN 55410 (US). (74) Agents: BRUSH, David, D. et al.; Westman, Champlin & Kelly, P.A., International Centre, Suite 1600, 900 Second Avenue South, Minneapolis, MN 55402-3319 (US).	(81) Designated States: CA, CN, MX, SG, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published *With international search report.* *Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.*

(54) Title: TEMPERATURE SENSOR TRANSMITTER WITH SENSOR SHEATH LEAD
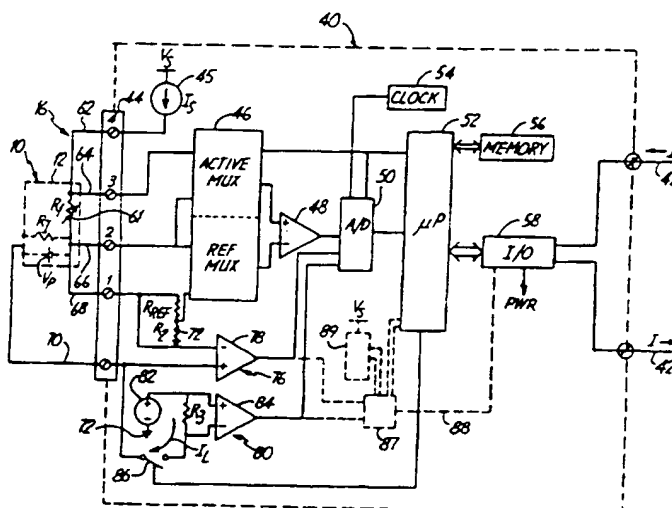
(57) Abstract

A temperature transmitter (40) in a process control loop (42) comprises a temperature sensor (10) and a transmitter circuit. The temperature sensor (10) includes a sensor sheath (12) and a sensor element (61) positioned within the sensor sheath (12). At least one element lead (16) is coupled to the sensor element (61) and extends from the sensor sheath (12). A sheath lead (70) is coupled to the sensor sheath (12) and extends from the sensor sheath (12), wherein the element lead (16) and the sheath lead (70) provide signals to be measured. The transmitter circuit includes an A/D converter (50), a microprocessor (52) and an input-output circuit (58). The A/D converter (50) is coupled to receive the signals from the element lead (16) and the sheath lead (70). The microprocessor (52) is coupled to the A/D converter (50). The input-output circuit (58) is coupled to the microprocessor (52) for communication with the process control loop (42). The sheath lead (70) allows the transmitter (40) to monitor the sensor sheath's insulation resistance and generation of parasitic sheath-to-lead voltage.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgystan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic	SD	Sudan
CF	Central African Republic		of Korea	SE	Sweden
CG	Congo	KR	Republic of Korea	SG	Singapore
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LR	Liberia	SZ	Swaziland
CS	Czechoslovakia	LT	Lithuania	TD	Chad
CZ	Czech Republic	LU	Luxembourg	TG	Togo
DE	Germany	LV	Latvia	TJ	Tajikistan
DK	Denmark	MC	Monaco	TT	Trinidad and Tobago
EE	Estonia	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	UG	Uganda
FI	Finland	ML	Mali	US	United States of America
FR	France	MN	Mongolia	UZ	Uzbekistan
GA	Gabon	MR	Mauritania	VN	Viet Nam

-1-

TEMPERATURE SENSOR TRANSMITTER
WITH SENSOR SHEATH LEAD

BACKGROUND OF THE INVENTION

The present invention relates to transmitters
5   used in process control loops. More specifically, the
present invention relates to a temperature transmitter
having a sensor with a sensor sheath lead.

Process control transmitters are used to
measure process parameters in process control systems.
10   Microprocessor-based transmitters include a sensor, an
analog-to-digital converter for converting an output of
the sensor into a digital form, a microprocessor for
compensating the digitized output and an output circuit
for transmitting the compensated output to
15   instrumentation and control equipment. Typically, this
transmission is over a process control loop, such as a
4-20 mA current loop.

One example of a process parameter is
temperature. Temperature is sensed by measuring the
20   resistance of a Resistive Temperature Device ("RTD"),
such as a Platinum Resistance Thermometer ("PRT"), or by
measuring a voltage output of a thermocouple sensor.
For example, the resistance of an RTD can be measured by
connecting the RTD in series with a known reference
25   resistance (R_{REF}) and applying a current common to both
resistances. The voltages across each resistance are
measured and digitized by the A/D converter. The
microprocessor receives the digitized values, calculates
the resistance of the RTD based on the digitized values
30   and compensates the calculated resistance for various
parasitic effects in the sensor and the transmitter.
The resulting resistance value is converted into a
corresponding sensor temperature value with a look-up

-2-

table or a suitable equation by the microprocessor. The output circuit in the transmitter receives the sensor temperature value and provides the value to the process control loop as an analog current level or as a digital
5   value superimposed on the analog circuit according to a known digital communication protocol.

A typical RTD is mounted within a distal end of a sensor sheath, which is typically a long, small diameter metal tube. A metal thermowell surrounds the
10   sensor sheath. The RTD is electrically coupled to the transmitter's electronics through a plurality of element leads which extend from the sensor sheath. A typical RTD includes two, three or four element leads. One problem associated with RTD and other sensors is that
15   the sensor sheath should remain electrically isolated from the sensor element and the element leads. The insulation resistance between the sensor sheath and the element leads may change over time or become shorted resulting in degraded or failed performance.

20   Another problem associated with temperature sensors is a parasitic sheath-to-lead voltage. A sheath-to-lead voltage is sometimes generated between the sensor sheath and the sensor element because of dissimilar metals being separated by an electrolyte made
25   up of ceramic impurities (ionics) in the sensor and water entering into the system. This voltage may corrupt sensor measurements and result in sensor failure.

A temperature sensor and transmitter are
30   needed which improve or substantially eliminate measurement errors from parasitic sheath-to-lead voltages and variations in insulation resistance.

-3-

SUMMARY OF THE INVENTION

The temperature sensor and associated transmitter of the present invention provide a measurement of sheath-to-lead voltage and insulation
5   resistance which can be used to evaluate present sensor performance or predict future performance. The temperature sensor includes a sensor sheath and a sensor element positioned within the sensor sheath. The sensor element is coupled to an element lead which extends
10   outwardly from the sensor sheath. A sheath lead is coupled to the sensor sheath and extends outwardly from the sheath with the element lead.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a perspective view of a
15   temperature sensor in accordance with the present invention.

Figure 2 is a block diagram of a temperature transmitter connected to measure temperature with an RTD sensor in accordance with one embodiment of the present
20   invention.

Figure 3 is a schematic diagram of an alternative insulation resistance measurement circuit.

Figure 4 is a schematic diagram of another alternative insulation resistance measurement circuit.
25   Figure 5 is a block diagram of a temperature transmitter connected to measure temperature with a thermocouple sensor according to another embodiment of the present invention.

Figure 6 is a fragmentary sectional view of a
30   temperature sensor having a sheath lead secured to a sensor sheath according to one embodiment of the present invention.

Figure 7 is a fragmentary sectional view of a temperature sensor having a sheath lead secured to a

SUBSTITUTE SHEET (RULE 26)

-4-

sensor sheath according to another embodiment of the present invention.

Figure 8 is a fragmentary sectional view of a temperature sensor having a sheath lead secured to a rear sensor housing according to another embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The temperature transmitter of the present invention includes a sensor with an additional lead extending from the sensor sheath for measuring an insulation resistance between the sensor sheath and at least one of the element leads, and for measuring a parasitic voltage generated between the sensor sheath and one of the element leads. With the additional lead, the temperature transmitter can periodically measure the insulation resistance and the parasitic voltage to verify the proper operation of the sensor. The measurements can be made in real time with an analog measurement circuit or can be converted into digital signals for analysis by a digital processing circuit. The transmitter monitors the measurements and issues an alert or alarm if the measurements reach predetermined levels. The measurements can be monitored over time for determining a residual life estimation of the sensor and for identifying errors that may be occurring or developing. The insulation resistance and sheath-to-lead voltage measurements can also be used as compensation variables to reduce or eliminate temperature measurement errors caused by changes in insulation resistance or parasitic sheath-to-lead voltage.

Figure 1 is a perspective view of a temperature sensor in accordance with the present invention. Temperature sensor 10 comprises a sensor

-5-

sheath 12, a mounting bolt 14 and a plurality of electrical leads 16. Sheath 12 houses a temperature sensor element (not shown in Figure 1) which is typically mounted near a distal end 18. Sensor 10 is
5   mounted such that distal end 18 is in thermal communication with a process to be controlled. In one embodiment, temperature sensor 10 includes threads 20 for attachment to a temperature transmitter which receives temperature measurements over leads 16 and
10 communicates those measurements over a process control loop.

In the embodiment shown in Figure 1, temperature sensor 10 includes a four-wire resistive temperature device (RTD) mounted within sheath 12.
15 Leads 16 include four element leads coupled to the RTD for making resistance measurements and a fifth lead coupled to sheath 12 for making insulation resistance and parasitic voltage measurements in accordance with the present invention.

20   Figure 2 is a block diagram of a temperature transmitter 40 connected to RTD temperature sensor 10 in accordance with the present invention. Transmitter 40 includes terminal block 44, current source 45, multiplexer 46 differential amplifier 48, high accuracy
25 A/D converter 50, microprocessor 52, clock circuit 54, memory 56 and input-output circuit 58.

Terminal block 44 includes terminals 1 through 5 for coupling to, for example, RTD temperature sensor 10 or a thermocouple temperature sensor 60 (shown in
30 Figure 5). Sensor 10 (and sensor 60) can be either internal or external to transmitter 40. Sensor 10 includes RTD sensor element 61 having a resistance R_1 which varies with changes in the ambient temperature immediately surrounding sheath 12. Leads 16 include

SUBSTITUTE SHEET (RULE 26)

-6-

four element leads 62, 64, 66 and 68, and a sheath lead
70. Lead 62 is connected between sensor element 61 and
terminal 4, lead 64 is connected between sensor element
61 and terminal 3, lead 66 is connected between sensor
5   element 61 and terminal 2, and lead 68 is connected
between sensor element 61 and terminal 1. Sheath lead
70 is connected between sensor sheath 12 and terminal 5.

Current source 45 is connected to terminal
block 44 and supplies a measurement current I_S through
10   terminal 4, sensor element 61, terminal 1, reference
resistance R_{REF}, pull-down resistance R_2 and ground
terminal 72. Sensor element 61 develops a voltage drop
across terminals 2 and 3 which is a function of the
resistance R_1 and thus the temperature of sensor element
15   61. Reference resistor R_{REF} is connected between
terminal 1 and pull-down resistor R_2.

Multiplexer 46 is divided into two sections,
an active multiplexer having an output connected to the
non-inverting input of differential amplifier 48 and a
20   reference multiplexer having an output connected to the
inverting   input   of   differential   amplifier   48.
Microprocessor 52 controls multiplexer 46 to multiplex
appropriate sets of analog signals, including signals
from terminals 1 through 3, to the non-inverting and
25   inverting   inputs   of   differential   amplifier   48.
Differential amplifier 48 has an output connected to A/D
converter 50. In one embodiment, A/D converter 50 has
an accuracy of 17 bits and a conversion rate of 14
samples/second. A/D converter 50 converts the voltage
30   at the output of differential amplifier 48 into a
digital value and provides that value to microprocessor
52 for analysis or for communication over process
control loop 42 through input-output circuit 58.

SUBSTITUTE SHEET (RULE 26)

-7-

Input-output circuit 58, in a preferred
embodiment, includes a HART® communication section, a
FIELDBUS communication section and a 4-20 mA analog loop
section for analog or bidirectional digital
5   communicating over loop 42 according to a selected
protocol in a known manner. Other protocols can also be
used. Loop 42 also provides power to the various
components of transmitter 40 through input-output
circuit 58. Transmitter 40 is wholly powered by the
10   two-wire loop 42.

Memory 56 stores instructions and information
for microprocessor 52, which operates at a speed
determined by clock circuit 60. Clock circuit 60
includes a real time clock and a precision high speed
15   clock, which are also used to sequence the operation of
A/D converter 50. Microprocessor 52 performs several
functions, including control of multiplexer 46 and A/D
converter 50, control of communication over loop 42,
temperature calculations, drift correction, circuitry
20   diagnostics, storage of transmitter configuration
parameters and performing sensor diagnostics.

Microprocessor 52 employs the following
equation to compute the major value of the temperature
of RTD sensor element 61:

25      $$R_1 = \frac{V_{R1}}{V_{RREF}} \left(R_{REFNOM} \right)$$ Equation 1

where:

    R_1 =   resistance of RTD sensor element 61;

    V_{R1} =   voltage drop across the RTD sensor
                           element 61;

30   V_{RREF} =   voltage drop across resistance R_{REF}; and

-8-

R_{REFNOM} = nominal resistance of the reference resistance R_{REF} in Ohms, and/or stored in memory 56.

Microprocessor 52 measures the voltage drop
V_{R1} across RTD sensor element 61 between terminals 2 and 3, and the voltage drop (V_{RREF}) across reference resistance R_{REF} with multiplexer 46. In a four-wire resistance measurement such as the one shown in Figure 2, the voltage drop across the connections to terminals 2 and 3 is largely eliminated, since substantially all of the current I_S flows between terminals 1 and 4, and has little impact on the accuracy of the measurement. Microprocessor 52 converts the measured resistance R_1 into temperature units with a look-up table or suitable equations stored in memory 30.

Transmitter 40 further includes a sheath-to-lead voltage measurement circuit 76 and an insulation resistance measurement circuit 80. Within temperature sensor 10, a sheath-to-lead voltage is sometimes generated between sensor sheath 12 and sensor element 61 because of dissimilar metals in the sensor being separated by an electrolyte made up of ceramic impurities (ionics) in the sensor and water entering into the system. The sheath-to-lead voltage is shown in phantom in Figure 2 as a voltage source V_p. Transmitter 40 measures voltage V_p through sheath-to-lead voltage measurement circuit 76.

Circuit 76 includes an amplifier 78 with an inverting input coupled to terminal 1, a non-inverting input coupled to terminal 5 and an output coupled to A/D converter 50. Amplifier 78 is therefore electrically placed across the insulation resistance barrier in sensor 10 (i.e. across sheath 12 and one of the element lead wires). Amplifier 78 measures the voltage

SUBSTITUTE SHEET (RULE 26)

-9-

difference across this barrier which is generated by voltage V_p. A/D converter 50 samples the sheath-to-lead voltage provided by amplifier 78 at a selected rate under the control of microprocessor 52. Microprocessor
5   52 stores the resulting voltage samples in memory 56, performs analysis on the stored samples and communicates one or more of the samples or diagnostic results over process control loop 42.

When measuring the sheath-to-lead voltage,
10   microprocessor 52 turns off external voltage or current sources, such as current source 45, that are connected to temperature sensor 10 such that amplifier 78 measures only the voltage generated by electrolytic action in sensor 10.

15   Insulation resistance measurement circuit 80 measures the insulation barrier within sensor 10 between sensor sheath 12 and sensor element 61, which is represented in Figure 2 by insulation resistance R_I (shown in phantom). Sensor sheath 12 should be
20   electrically isolated from sensor element 61 and element leads 62, 64, 66 and 68. Insulation resistance R_I is the resistance between sensor sheath 12 and any one of the element leads 62, 64, 66 and 68. The insulation resistance R_I should be very high in a good sensor, on
25   the order of 100-500 megohms. An insulation resistance below 1 megohm might be considered a failed sensor.

Measurement circuit 80 includes voltage source 82, measurement resistance R_3, amplifier 84 and switch 86. Voltage source 82 is connected between measurement
30   resistance R_3 and ground terminal 72. Measurement resistance R_3 is connected in series with voltage source 82, switch 86 and insulation resistance R_I, which is in series with reference resistance R_{REF} and pull-down resistance R_2. Measurement resistance R_3, insulation

SUBSTITUTE SHEET (RULE 26)

-10-

resistance R_I, reference resistance R_{REF} and pull-down resistance R_2 form a current path from voltage source 82 to ground terminal 72. Current flowing through the current path is the leakage current from sensor sheath

5   12 to RTD sensor element R_1, which is a function of the insulation resistance R_I. The voltage drop across measurement resistance R_3 is a function of the leakage current I_L and thus the insulation resistance R_I. The non-inverting and inverting inputs of amplifier 84 are

10   connected across measurement resistance R_3 to measure the voltage drop across measurement resistance R_3. In a preferred embodiment, amplifier 84 has a very low input bias current. The output of amplifier 84 is connected to A/D converter 50 which converts the voltage

15   measurement to a digital value at a selected rate under the control of microprocessor 52. Microprocessor 52 stores the resulting digital values in memory 56. When microprocessor 52 makes an insulation resistance measurement, microprocessor 52 turns off current source

20   45 and closes switch 86 to connect measurement circuit 80 to terminal 5 to drive leakage current I_L through insulation resistance R_I. Once the measurement has been completed, microprocessor 52 opens switch 86, thereby disconnecting voltage source 82 from sensor sheath 12.

25   Microprocessor 52 performs diagnostic tests based on the stored values and communicates the values or diagnostic results to process control loop 42. As part of its diagnostic functions, microprocessor 52 determines whether insulation resistance R_I or the

30   sheath-to-lead voltage V_p reach predetermined values stored in memory 56. If so, microprocessor 52 identifies sensor 10 as a failing or failed sensor and notifies control equipment coupled to process control loop 42. For example, microprocessor sets an alert

-11-

indicating a failing sensor if one or more of the measurement values reach a first level and sets an alarm indicating a failed sensor if one or more of the measurements reach a second level. Microprocessor 52
5   also tracks a long term trend of the change in R_I and V_p, which can be used as an early indication of sensor degradation.

            In an alternative embodiment (not shown), temperature transmitter 40 is coupled to a plurality of
10   temperature sensors 10. Terminal block 44 and multiplexer 46 are simply extended to accommodate the additional sensors. Each sensor has a sheath-to-lead voltage measurement circuit 76 and insulation resistance measurement circuit 80 which is fed to A/D converter 50.
15   Alternatively, the same measurement circuits can be used with appropriate multiplexing.

            In another alternative embodiment, temperature transmitter includes a real time analog measurement circuit as opposed to the digital measurement circuit
20   shown in Figure 2. The analog measurement signals generated by sheath-to-lead voltage measurement circuit 76 and insulation resistance measurement circuit 80 are provided to an analog comparison circuit 87 (shown in phantom). The comparison circuit compares the
25   measurement signals with predetermined levels and generates an alert or alarm 88 which is transmitted over loop 42 by input-output circuit 58. The predetermined levels can be stored in memory 56 and provided to the comparison circuit in analog form by microprocessor 52
30   or can be generated by a reference level generator 89 (shown in phantom). Generator 89 includes digital or analog components, such as an adjustable voltage divider. Various other circuit configurations can also

-12-

be used to provide real time analog measurements of the
insulation resistance and the sheath-to-lead voltage.

Figure 3 is a schematic diagram illustrating
an alternative insulation resistance measurement circuit
5   90 according to the present invention. The same
reference numerals are used in Figure 3 as were used in
Figure 2 for common elements, and several elements
appearing in Figure 2 have been removed for simplicity.
The sensor insulation resistance R_I is connected in
10   series with measurement resistance R_3, and amplifier 84
is connected across measurement resistance R_3. Voltage
source 82 is connected across the series connection of
resistances R_I and R_3 through switch 86. Switch 86 can
include any suitable switch, but preferably includes a
15   semiconductive switching element such as a transistor.

The embodiment shown in Figure 3 is
particularly useful with amplifiers having a high input
bias current or an unknown input voltage offset since it
compensates for the amplifiers' deficiencies. The
20   measurement and compensation are performed in two steps.
In step one, microprocessor opens switch 86 so that the
only current flowing through measurement resistance R_3
is the input bias current, which is the common mode
circuit voltage of amplifier 84 multiplied by R_3. The
25   resulting voltage at the output of amplifier 84 is
converted into a digital value by A/D converter 50 and
stored in memory 56 by microprocessor 52. In step 1,

$$V_1 = I_B R_3 \qquad \text{Equation 2}$$

where,

30   V_1 =   voltage drop across resistance R_3 during
                       step 1;

       I_B =   input bias current of amplifier 84; and
       R_3 =   resistance of measurement resistor R_3.

SUBSTITUTE SHEET (RULE 26)

-13-

In step two, microprocessor 52 closes switch 86. The current I_2 flowing through measurement resistance R3 is now the leakage current I_L through insulation resistance R_I plus the input bias current I_B:

5
$$I_2 = I_L + I_B \qquad\qquad \text{Equation 3}$$

As a result, the voltage drop across R_3 becomes:

$$V_2 = I_2 R_3 = (I_L + I_B) R_3 \qquad\qquad \text{Equation 4}$$

where,

V_2	=	voltage drop across resistor R_3 during step 2;
I_2	=	current flowing through resistance R_2 during step 2; and
I_L	=	leakage current through insulation resistance R_I.

10

15 Subtracting Equation 3 from Equation 4,

$$V_2 - V_1 = I_L R_3 \qquad\qquad \text{Equation 5}$$

As shown in Equation 5, the resulting voltage is representative of the sensor insulation leakage current I_L with the bias current and offset voltages

20 cancelled. The computations shown in Equation 5 are performed by microprocessor 52.

When insulation resistance measurement circuit 80 is inactive, it is desirable to force the sheath lead 70 to the same potential as RTD sensor element R_1 to

25 minimize potential across the insulating interface, which, in turn, minimizes the potential of breakdown or leakage development over time.

Figure 4 is a schematic diagram of another alternative insulation resistance measurement circuit

30 according to the present invention. Insulation resistance measurement circuit 92 further includes a

-14-

switch 94 connected in parallel with the series
connection of insulation resistance R_I and measurement
resistance R_3. In the embodiment shown in Figure 3,
switch 86 preferably has a very high impedance in the
5   open state. With the addition of switch 94, switch 86
no longer requires a very high impedance in the open
state. Microprocessor 52 operates switches 86 and 94
such that when switch 86 is in the open state, switch 94
is in the closed state, and when switch 86 is in the
10   closed state, switch 94 is in the open state. Because
switch 94 is closed when switch 86 is open, even if
switch 86 has some leakage, the voltage potential across
the series connection of resistances R_I and R_3 is
equalized such that very little leakage current flows
15   other than the input bias current of amplifier 84.

Figure 5 is a block diagram illustrating a
temperature sensor 100 coupled to a thermocouple sensor
60 in accordance with the present invention. Sensor 60
has a sheath 104 and a thermocouple element 106.
20   Thermocouple element 106 creates a voltage $V_{TCINPUT}$
across terminals 1 and 2, which are applied to amplifier
48 through multiplexer 46. Transmitter 100 measures the
temperature of thermocouple element 106 by determining
a thermocouple voltage V_{TC} with the following equation:

25   $$V_{TC} = \frac{V_{TCINPUT}}{V_{TCREF}} \left(V_{TCREFNOM} \right) \qquad \text{Equation 6}$$

where,

$V_{TCINPUT}$ = measured voltage across terminals 1 and
                     2 of terminal block 44 sensed by
                     amplifier 48;

SUBSTITUTE SHEET (RULE 26)

-15-

V_{TCREF} = measured voltage generated by voltage reference circuit 108 sensed by amplifier 48; and

$V_{TCREFNOM}$ = nominal value of voltage reference circuit 108 stored in memory 56.

Voltage reference circuit 108 is connected between reference resistance R_{REF} and ground terminal 72 for providing voltage reference V_{TCREF} to multiplexer 46. Voltage reference circuit 108 includes resistors 110 and 112 connected as a voltage divider and Zener diode 114.

The junction between two dissimilar metals formed at terminal 1 introduces a cold junction error voltage proportional to the temperature of the junction. Microprocessor 52 senses the error voltage by measuring the temperature of the junction at terminal 1 based upon the resistance of a platinum resistance thermometer (PRT) sensor 116 and subsequently using a standard equation or look-up table in memory 56 to determine the cold junction error voltage. The resistance of PRT sensor 116 is measured using Equation 1 by applying a source current I_S with current source 45, as discussed above with reference to Figure 2.

Microprocessor 52 calculates V_{TC} according to Equation 6 above, then effectively subtracts the resistance of PRT sensor 116 from V_{TC} using an appropriate look-up table or equation stored in memory 56. Then, the resulting compensated temperature of thermocouple element 18 is coupled to process control loop 42 through input-output circuit 58. Sheath-to-lead voltage measurement circuit 76 and insulation resistance measurement circuit 80 operate in the same fashion as was discussed with reference to Figures 2-4.

-16-

Figures 6-8 illustrate the attachment of the sensor sheath to the temperature sensor according to various embodiments of the present invention. In Figure 6, temperature sensor 150 includes rear sensor housing

5   152 and sensor sheath 154, which are formed of suitable materials such as stainless steel. Sensor sheath 154 is a small diameter metal tube having a proximal end 156 which is secured to rear sensor housing 152 in a known manner. A sensor element (not shown) is mounted within

10   a distal end of the tube. Four element leads 158 extend through sensor sheath 154 and rear sensor housing 152 for connection to a measurement device, such as a temperature transmitter. A sheath lead 160 is attached to proximal end 156 of sensor sheath 154 and extends

15   through rear sensor housing 152 for connection to the measurement device. In the embodiment shown in Figure 6, sheath lead 160 is welded to proximal end 156 through a TIG weld 162.

In the embodiment shown in Figure 7, sheath

20   lead 160 is secured to proximal end 156 along an outer diameter surface 164 of sensor sheath 154. Sheath lead 160 can be secured by spot welding or brazing, for example. In Figure 8, sheath lead 160 is secured to an outer diameter surface 166 of rear sensor housing 152 by

25   spot welding or a brazing, for example. The locations and methods of attaching sheath lead 160 to rear sensor housing 152 or sensor sheath 154 provided herein are examples only. Other attachment locations or attachment methods can also be used. Sheath lead 160 can also be

30   attached to any other element which is in electrical contact with rear housing 152 or sensor sheath 154. As such, the term "sheath" used in the specification and in the claims refers to the sheath itself or any element in electrical contact with the sheath.

SUBSTITUTE SHEET (RULE 26)

-17-

Although the present invention has been described with reference to preferred embodiments, workers skilled in the art will recognize that changes may be made in form and detail without departing from

5   the spirit and scope of the invention. For example, multiple sensors could be coupled to a single transmitter, with an appropriate multiplexer. The parasitic voltage and insulation resistance measurement circuits can be internal or external to the transmitter,

10 and can have various circuit configurations for providing an analog voltage to A/D converter 50 which is representative of the parameter being measured. In addition, a temperature sensor having a sheath lead according to the present invention can be used with a

15 variety of different transmitters and transmitter configurations or any type of temperature measurement device. The configuration discussed herein is provided only as an example. Further, any type of temperature responsive sensor may be used, and the RTD and

20 thermocouple are merely examples. Additionally, the sheath may be of any shape or materials, and the connection to the sheath may be through any technique. The term "coupled" can include various types of connections or couplings and can include a direct

25 connection or a connection through one or more intermediate components.

-18-

WHAT IS CLAIMED IS:

1.   A temperature transmitter in a process control
loop, comprising:

    a temperature sensor comprising:

        a sensor sheath;

        a sensor element positioned within the
            sensor sheath;

        an element lead coupled to the sensor
            element and extending from the
            sensor sheath; and

        a sheath lead coupled to the sensor
            sheath and extending from the
            sensor sheath, wherein the element
            lead and the sheath lead provide
            signals to be measured; and

    a transmitter circuit comprising:

        an A/D converter coupled to receive the
            signals from the element lead and
            the sheath lead;

        a microprocessor coupled to the A/D
            converter; and

        an input-output circuit coupled to the
            microprocessor for communication
            with the process control loop.

2.   The temperature transmitter of claim 1 wherein
the transmitter circuit further comprises a sheath-to-
lead voltage measurement circuit coupled between the
element lead, the sheath lead and the A/D converter.

3.   The temperature transmitter of claim 2 wherein
the sheath-to-lead voltage measurement circuit comprises
an amplifier having first and second inputs coupled to
the sheath lead and the element lead, respectively, and
having an amplifier output coupled to the A/D converter.

SUBSTITUTE SHEET (RULE 26)

4.	The temperature transmitter of claim 1 wherein the temperature sensor further comprises an insulation resistance between the sensor sheath and the element lead and wherein the transmitter circuit further comprises an insulation resistance measurement circuit coupled between the sheath lead and the A/D converter.

5.	The temperature transmitter of claim 4 wherein the insulation resistance measurement circuit comprises:

a measurement resistance coupled to the sheath lead, in series with the insulation resistance;

a voltage source coupled in series with the measurement resistance; and

an amplifier having first and second inputs coupled in parallel with the measurement resistance and having an amplifier output coupled to the A/D converter.

6.	The temperature transmitter of claim 1 wherein the transmitter circuit further comprises:

a current source;

a reference resistance;

first, second, third and fourth element leads extending from the sensor sheath;

wherein the sensing element comprises an RTD having first and second terminals;

wherein the first element lead is coupled between the first terminal of the RTD and the reference resistance;

wherein the second element lead is coupled to the first terminal of the RTD;

wherein the third element lead is coupled to the second terminal of the RTD; and

-20-

wherein the fourth element lead is coupled
between the second terminal of the RTD
the current source.

7.   The temperature transmitter of claim 1 wherein
the transmitter circuit further comprises:

a reference resistance;

first and second element leads extending from
the sensor sheath;

wherein the sensing element comprises a
thermocouple having first and second
terminals;

wherein the first element lead is coupled
between the first terminal of the
thermocouple and the reference
resistance; and

wherein the second element lead is coupled to
the first terminal of the thermocouple.

8.   The temperature transmitter of claim 1 wherein
the transmitter circuit further comprises means for
comparing the signals to be measured with a
predetermined level and for generating a signal as a
function of the comparison.

9.   A temperature sensor comprising:

a sensor housing;

a temperature sensing element positioned
within the sensor housing;

an element lead coupled to the temperature
sensing element an extending outwardly
from the housing; and

a sheath lead coupled to the sensor housing
and extending from the sensor housing,
with the element lead.

-21-

10.   The temperature sensor of claim 9 wherein:

the temperature sensing element comprises an
     RTD with first and second terminals; and

the element lead comprises first and second
     current delivery leads and first and
     second voltage measuring leads, with the
     first current delivery lead and the
     first voltage measuring lead being
     coupled to the first RTD terminal and
     with the second current delivery lead
     and the second voltage measuring lead
     being coupled to the second RTD
     terminal.

11.   The temperature sensor of claim 9 wherein the
temperature sensing element comprises a thermocouple
with first and second terminals and wherein the
temperature sensor further comprises:

     first and second voltage measuring leads
          extending from the sensor sheath, with
          the first voltage measuring lead being
          coupled to the first terminal of the
          thermocouple and the second voltage
          measuring lead being coupled to the
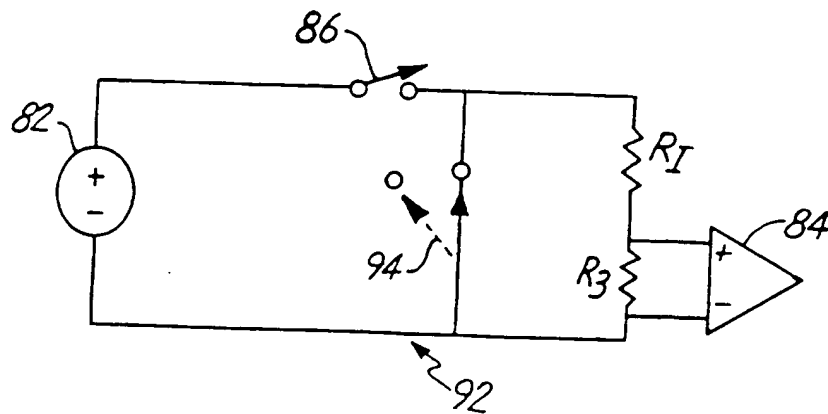   second terminal of the thermocouple.
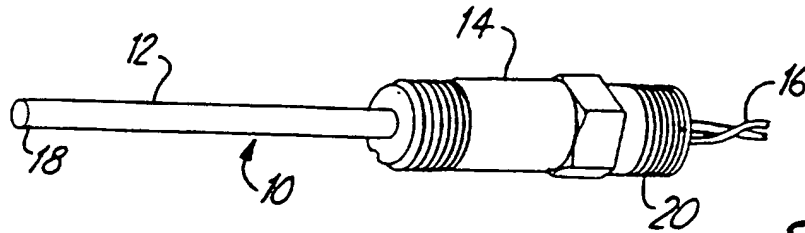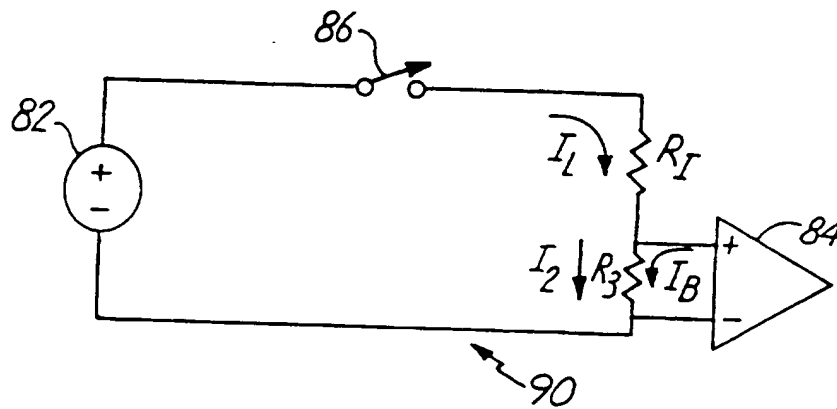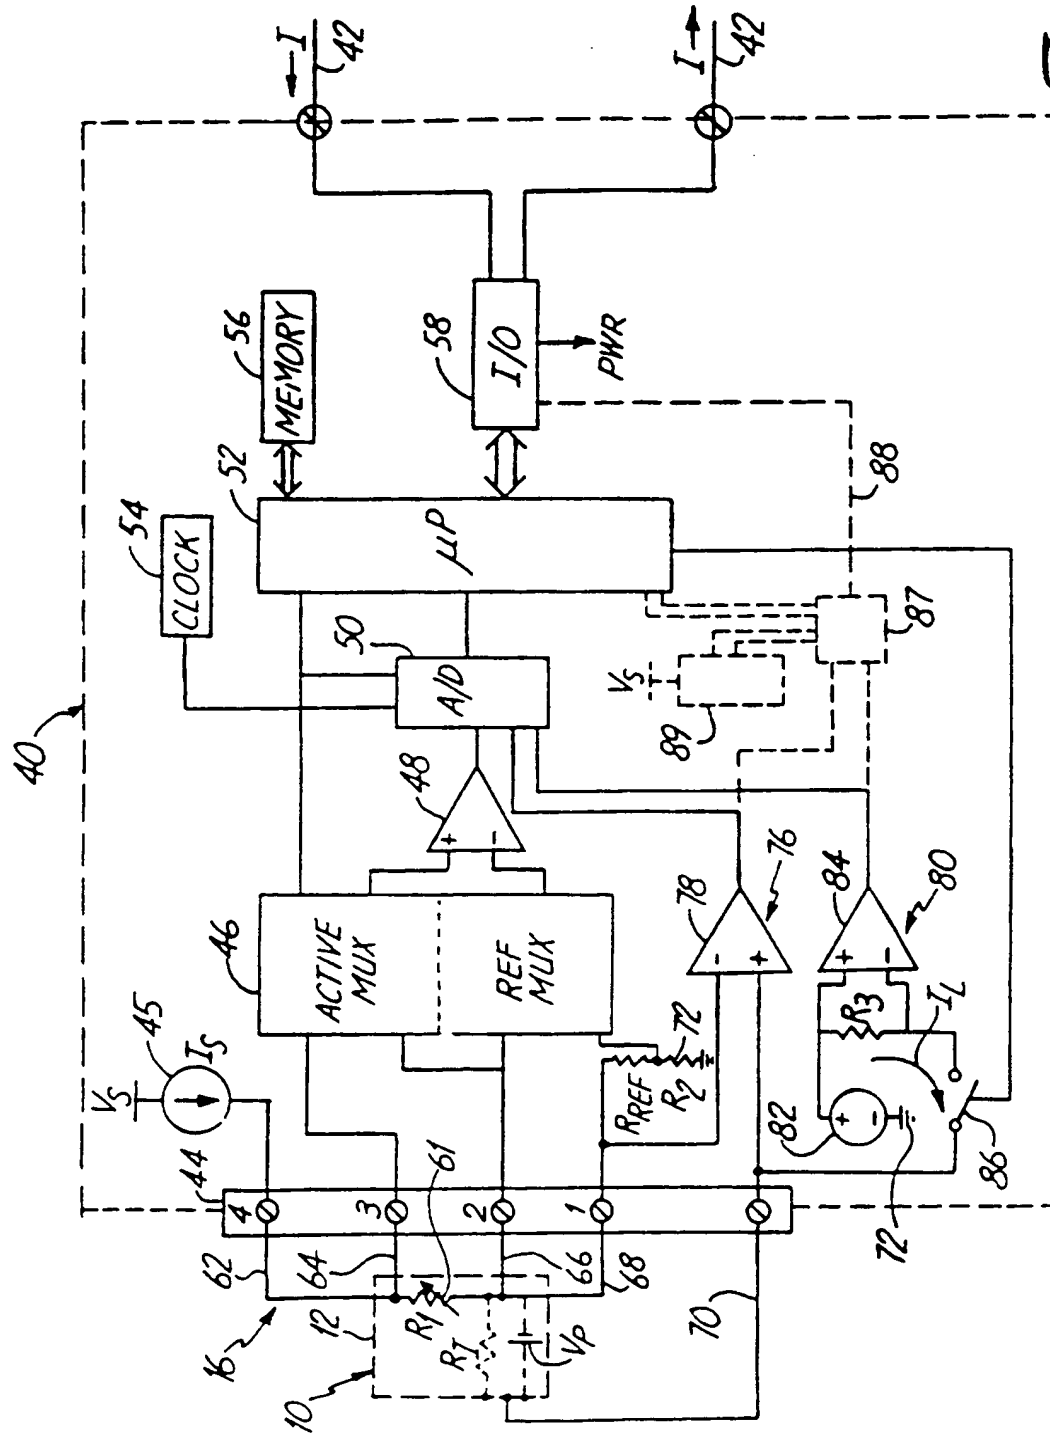
Fig. 1

Fig. 3

Fig. 4

Fig. 2
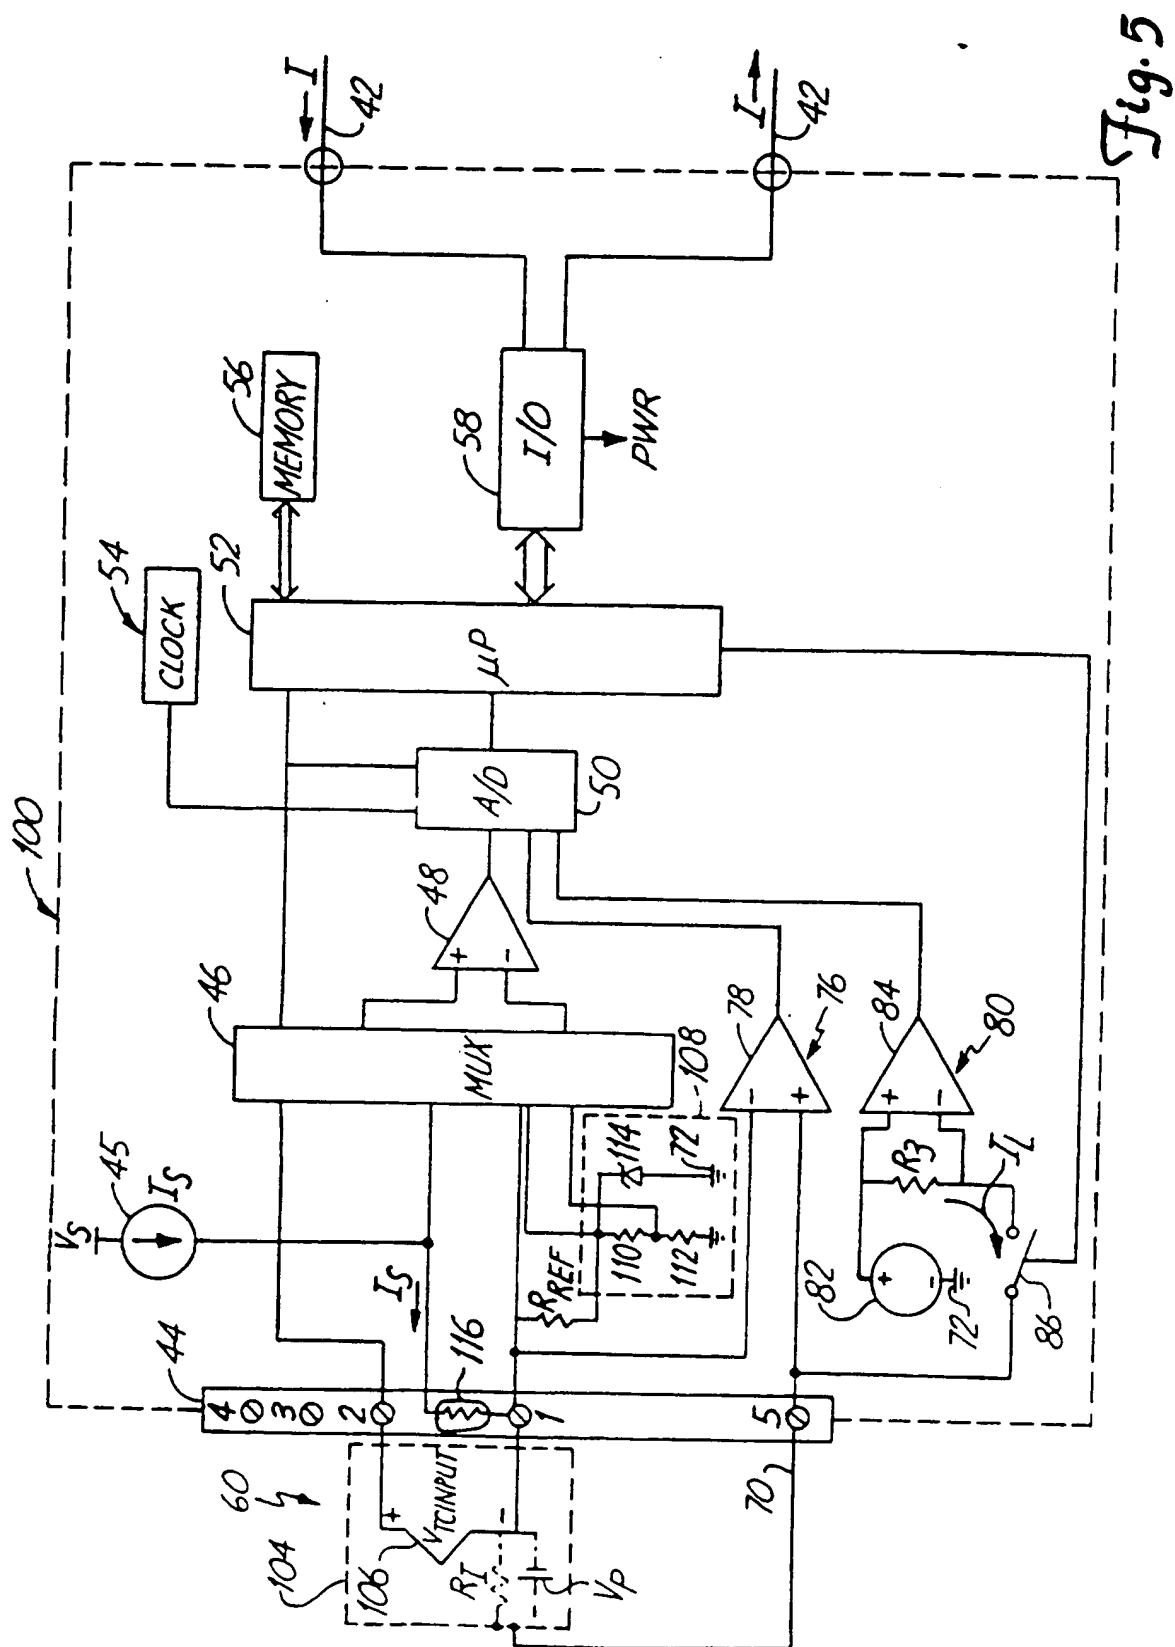
Fig. 5

Fig. 6

Fig. 7

Fig. 8
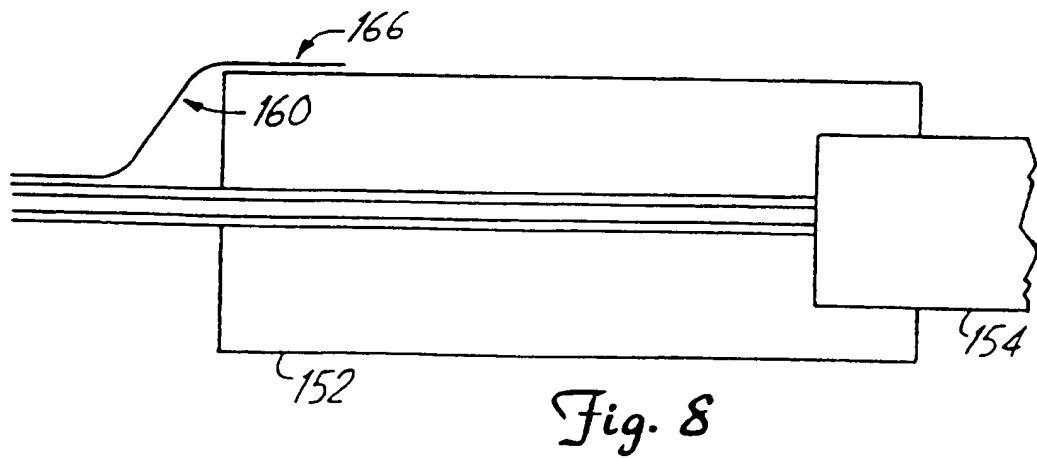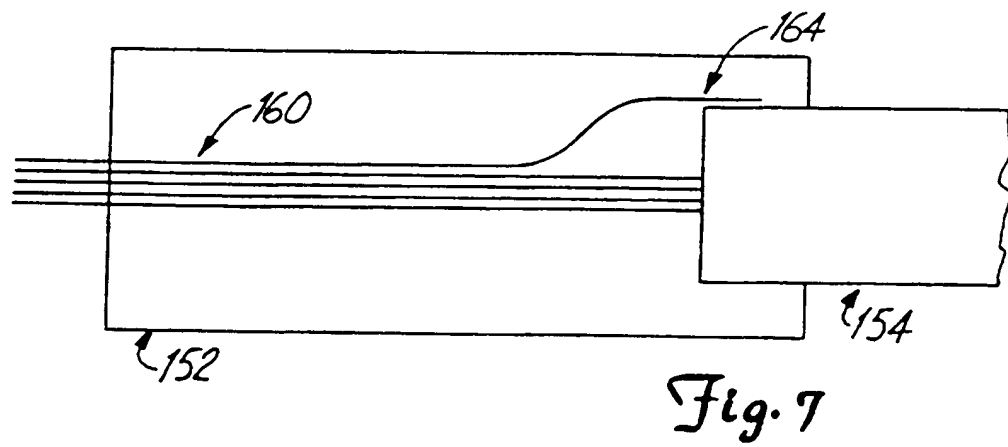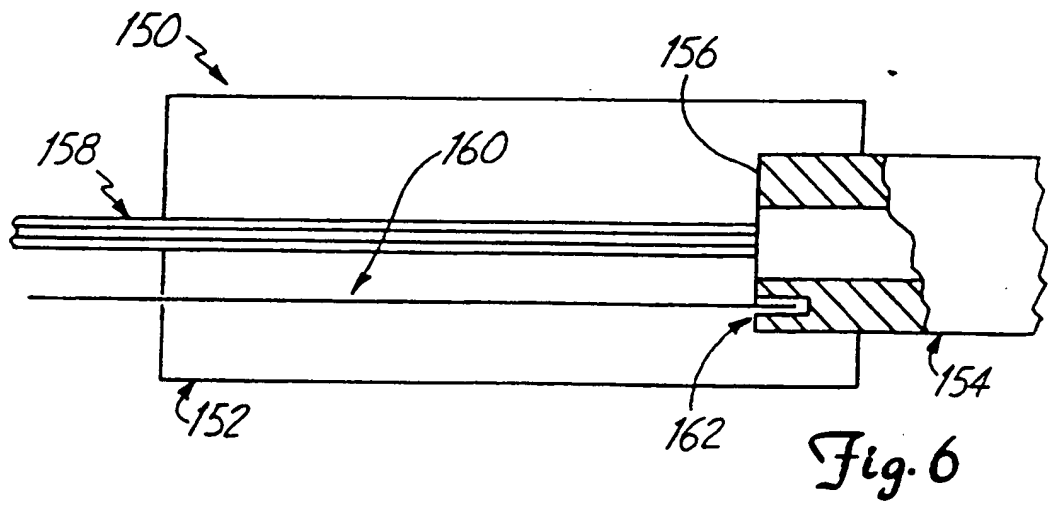
INTERNATIONAL SEARCH REPORT

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6   G01K15/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6   G01K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 59 072 784 A (ISHIKAWAJIMA HARIMA JUKOGYO KK) 24 April 1984 see the whole document	1,7
A	JP 06 313 781 A (NIPPON TETSUDO KENSETSU KODAN;OTHERS: 01) 8 November 1994 see the whole document	1
A	IEEE INSTRUMENTATION AND MEASUREMENT TECHNOLOGY CONFERENCE, SAN DIEGO, APRIL 20 - 22, 1988, no. 1988, 20 April 1988, INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS, pages 168-172, XP000011962 VESELIN SKENDZIC ET AL: "A PRECISION MICROPROCESSOR BASED FIVE CHANNEL DIGITAL THERMOMETER" see the whole document	1,7,8

-/--

[X] Further documents are listed in the continuation of box C.   [X] Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
10 April 1997	0 6. 05. 97

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (- 31-70) 340-2040, Tx. 31 651 epo nl, Fax (- 31-70) 340-3016	Ramboer, P

Form PCT/ISA/210 (second sheet) (July 1992)

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 58 102 170 A (FUJITSU KK) 17 June 1983 see the whole document ---	1
A	JP 61 234 371 A (SUMITOMO ELECTRIC IND LTD) 18 October 1986 see the whole document -----	1

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 59072784 A	24-04-84	NONE	
JP 06313781 A	08-11-94	NONE	
JP 58102170 A	17-06-83	JP 1057745 B JP 1574627 C	07-12-89 20-08-90
JP 61234371 A	18-10-86	NONE	